



Product Overview:

The standard FS-30 scallop feeder is designed to feed and orient bottles and other cylindrical parts with the use of urethane scallops. Parts are radially oriented and gently qualified in the scallop pockets by means of sweeps, wipers, pneumatic and/or electric devices depending on specific product characteristics. Oriented parts are discharged and carried away by various downstream in-line devices.


Part Number	FS301RLASA
Motor Style	AC
Motor Voltage	230/460V
Horsepower	1/3hp

Standard Features:

- All stainless steel exterior construction
- FDA approved ABS vacuum formed disc
- Teflon hard-coated finished aluminum bowl
- Air clutch
- Hinged polycarbonate cover with safety interlocks
- Backup Ring

Available Options:

- Washdown motor(s)
- Urethane scallop kit
- NEMA 1 encased controller

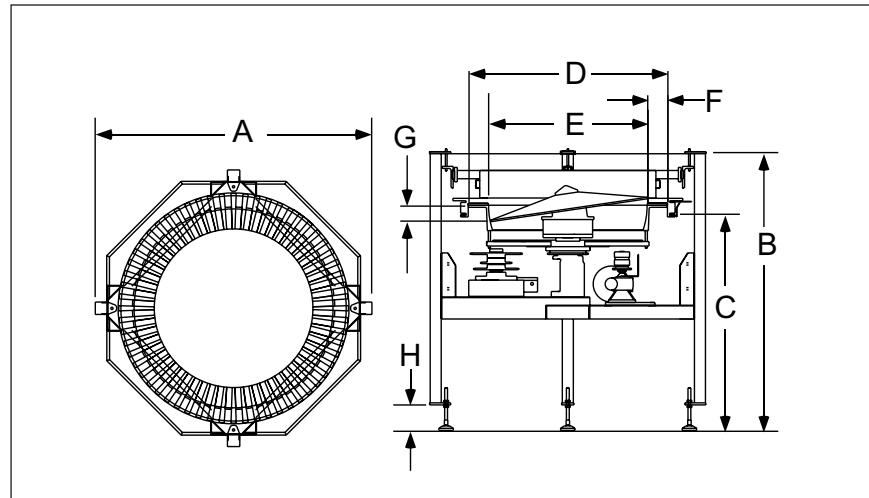

Accessories:

FS Series Scallop Kit	FS30SCALXX
(includes segment plates and one of the following number of scallops: 36, 48, 54, 60 or 72)	

Product Specifications		ANSI	Metric
A	Outside Diameter	50.25"	1276mm
B	Frame Height	46"	1168mm
C	Discharge Height	36"	914mm
D	Bowl Outside Diameter	36.12"	917mm
E	Bowl Inside Diameter	28.80"	732mm
F	Rim Width	3.66"	93mm
G	Bowl Depth	3.98"	101mm
H	Level Foot Adjustment	5" ± 2.5"	127 ± 64mm